

Heidra 150NC Pump


The Godwin Heidra 150NC hydraulic submersible pump is a compact self-contained pumping unit featuring a diesel driven power pack and hydraulic pump end. With variable speed diesel engine power, the Heidra 150NC can meet a variety of flow and head requirements up to 346 m³/hr and total dynamic head requirements up to 43 metres.

It also has dry running capabilities, a hard iron I impeller, providing a rugged dewatering / solids handling, hydraulic submersible pump ready to go anywhere.

Features

- 150 mm bauer discharge connection. The quick release lever allows pipe work to be connected & disconnected very easily.
- Double mechanical seal in its own clean oil bath allows for indefinite dry running. Inboard seal: silicon carbide. Outboard seal: carbon or ceramic.
- Gear motor connections are standard two-bolt SAE flange & shaft. Which allows easy connection to plug directly into bearing bracket.
- Incorporates high efficiency N-Pump technology.
- Safe pump end no risk of electric shock or explosion.
- N Pump impeller with replaceable wearplates provide a non clog solution to pumping.
- Alternative options available e.g. Highway trailer, Site trolley.
- Godwin Power Pack GHPU30 as standard.

Performance

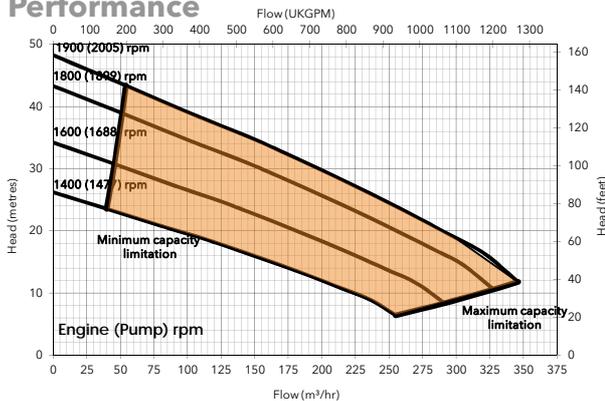

Reference number : 95-1225-1000
 Date of issue : 07 March 2014
 Issue : 2



TLPN: HEIDRA150NC-01-001

Specifications

Suction connection	150 mm with strainer
Delivery connection	6" BSP (F)
Max capacity	346 m ³ /hr
Max Head	43 metres
Max operating speed	1900 rpm
Max Impeller diameter	286 mm
Max operating temperature	60 °C *
Max pressure	4.7 bar
Max suction pressure	4.0 bar
Max casing pressure	7.1 bar
Max Solids handling	-

* Please contact our office for applications in excess of maximum temperature.

Materials

Pump casing & suction cover	Cast iron CI BS EN1561/EN-JL1030 (220)
Wearplates	Rear - Cast iron BS1452 Gr220 Front - Hard Iron
Pump Shaft	Carbon Steel BS 970-3:1991 080M40
Impeller	Hard Iron BS EN 12513:2000
Mechanical Seal Face	Silicon Carbide vs Silicon Carbide
Suction Strainer & Lifting Bracket	Fabrication Mild Steel tube and plate.

Pump end - dimensions

Length	458 mm
Width	579 mm
Height	855 mm
Dry Weight	175 kg

Hydraulic Drive data

Hydraulic Drive pressure	250 bar
Pump speed	2000 rpm
Hydraulic motor	Gear type
Hydraulic motor displacement	52 cc/rev
Hydraulic Flow	100 l/min

Please contact the factory or office for further details.
 A typical picture of the pump is shown.
 All information is approximate and for general guidance only.

Godwin Hydraulic Power Pack

Power Pack - GHPU30 1104D-44T

General data

Engine: Perkins 1104D-44T (55 kW @ 2000 rpm)	
Engine speed	2000 rpm
Hydraulic Pump	Gear type
Hydraulic pump displacement	59 cc/rev
Output flow	100 l/min
Hydraulic reservoir capacity	230 litres

Maximum hose lengths

Engine (rpm)	1400	1600	1800	2000
Max Length (mtrs)	60	50	45	30

Hydraulic Hose

Feed/Return	25 mm (1") BSP Quick Disconnect & 25 mm (1") NB pipe.
Bleed Line	13 mm (½") BSP Quick Disconnect & 13 mm (½") NB pipe.

Open set configuration

TLPN: GHPU30-DBO-001



Dimensions

Length	2500 mm
Width	1300 mm
Height	2135 mm
Wet weight	2,050 kg
Fuel tank capacity (Full)	390 litres

Hush-Pac configuration

TLPN: GHPU30-DBH-001



Dimensions

Length	2890 mm
Width	1303 mm
Height	2100 mm
Wet weight	2,225 kg
Fuel tank capacity (Full)	340 litres

Xylem Dewatering Solutions UK Ltd
Quenington, Cirencester
Gloucestershire GL7 5BX, England
Tel: +44 (0)1285 750271 Fax: +44 (0)1285 750352

Reference number : 95-1225-1000-GHPU30
Date of issue : 07 March 2014
Issue : 2

www.godwinpumps.com

Acoustic information

Engine	Speed (rpm)	Average Sound Pressure rating (dB(A))		
		1 m	3 m	7 m
Hushpac	1200	71	64	64
	1500	75	68	65
	2200	80	79	77

xylem
Let's Solve Water



Assessed to ISO
9001:2008

godwin
a xylem brand